


Pencllic[®]

www.pencllic.se

EN

Welcome to the quick guide. Penclitc Mini Keyboard combines ergonomically sound design with modern keyboard technology to bring you comfort and efficiency.

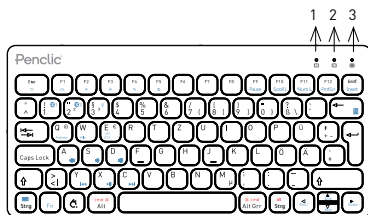




1. Caps Lock Indicator
2. USB/Bluetooth Connection Indicator and Bluetooth Status Indicator
3. Power, Charging, and Battery Power Indicator




4. Power switch, move right (left in picture) to turn on.
5. Micro USB port, for wired connection and charging

Light function description

1. Caps Lock Indicator: The blue light will be on.
2. USB / Bluetooth state indicator: Press "Fn +  " switch to wireless connection. Light will turn blue. Press "Fn +  " switch to wired connection when cable is connected. Light will turn green.

Bluetooth connect status indicator: Blue light will flash after pressing the "Fn +  " keys together.




3. Power Indicator: Slide the power button to right side, the power indicator will turn green. Charging Indicator: Red light whilst charging, turns off once fully charged.

Battery power display indicator. Press "Fn +  " to show battery status. Status indication: Flashing green. (Each flash represents 25% battery. One Flash 25% charge. Two Flashes, 50% charge. Three Flashes, 75% charge. Four Flashes, 100% charge)

Keys and functions

Select your operating system after connecting to device.

Keyboard combination Operating system

- Fn +  Android
Fn +  PC
Fn +  iOS och OSX

Function list of escape and function key row.

For the Windows tablets, Hold Fn and press key simultaneously to activate action.

	Android	iOS	Windows	OSX
	Back	N/A	N/A	N/A
	Home	Home	Web Browser	N/A
	Reduce Brightness	Reduce Brightness	Reduce Brightness	Reduce Brightness
	Increase Brightness	Increase Brightness	Increase Brightness	Increase Brightness
	Search for	Search for	Search for	N/A
	N/A	Switch Language	N/A	Switch Language
	Previous Track	Previous Track	Previous Track	Previous Track
	Play/Pause	Play/Pause	Play/Pause	Play/Pause
	Next Track	Next Track	Next Track	Next Track
	Mute	Mute	Mute	Mute
	Volume down	Volume down	Volume down	Volume down
	Volume up	Volume up	Volume up	Volume up
	Screen Lock	Screen Lock	Screen Lock	N/A
	N/A	N/A	PrintScr	N/A
Fn + 	N/A	Keyboard Display	N/A	N/A
Fn + 	Battery Power Display	Battery Power Display	Battery Power Display	Battery Power Display

Special Note:


1. This keyboard doesn't support the Windows Mobile.
2. For Android users: The Caps Lock indicator may not light up, but will still function normally.
3. While connected to an iOS or OSX device, the red printing is used. PC standard layout and Apple standard layout are slightly different

Bluetooth and wired function introduction


1. Bluetooth wireless connection: Fit for devices with Bluetooth function. Like tablets, smartphones, etc.
2. USB wired connection: Fit for devices which can be connected with USB cable, like notebooks, PC, etc.
3. Micro-USB cable. Wired mode: connect with desktops and notebooks, sync and charging function. Wireless mode: charging for the keyboard.

Pairing with tablets and phones

1. Step 1. Slide the Power switch to right side, to turn on the keyboard, power light will turn green for 10 seconds. Note the State light should be blue.


Optional step. If the State light is green when power is switched on, press "Fn +  " key to change to Bluetooth state.



2. Step 2. Pairing: Hold Fn key then press bluetooth channel 1 or 2 for 2 seconds to activate pairing mode.

3. Step 3. On the iPad, select: Settings- Bluetooth-On.
4. Step 4. The iPad will display "Pencil Mini Keyboard KB3" as an available device.
5. Step 5. Select "Pencil Mini Keyboard KB3" on the iPad, click on it, the keyboard will now be paired to iPad and the Bluetooth indicator will turn off.
6. Step 6. Press "Fn +  " keys on the keyboard switch to the iOS operating system setting.



Pairing with desktop (bluetooth)

1. Step 1. Slide the Power switch to right side, to turn on the keyboard, power light will turn green for 10 seconds. Note the State light should be blue.

Optional step. If the State light is green when power is switched on, press "Fn +  " key to change to Bluetooth state.

2. Step 2. Pairing: Hold Fn key then press bluetooth channel 1 or 2 for 2 seconds to activate pairing mode.  LED will blink blue. Press the "Fn +  " Keys together to enter pairing mode. The Bluetooth light will start to blink blue.
3. Step 3. On your device, go to "settings". Activate its Bluetooth function and search for the keyboards device.
4. Step 4. The device will display "Pencil Mini Keyboard KB3" as an available device.
5. Step 5. Select "Pencil Mini Keyboard KB3" on your device, click on it, the keyboard will now be paired to your device and the Bluetooth indicator will turn off.
6. Step 6. Choose your operating system.


Fn +  Android


Fn +  Win PC/Windows
Fn +  iOS and OSX


Switching between already paired Bluetooth devices:

Hold Fn then tap 1 or 2 key to switch between already paired devices. Switching time depends on the device.

Pairing with desktop (cable)

Connect the microUSB charge cable.  LED will turn green or red depending on charge status.


Hold Fn key then press 3. The  LED will turn green if the connection to the computer is ok.

Fn +  Android
Fn +  Win PC/Windows
Fn +  iOS and OSX

Note for wireless mode

1. For other Bluetooth enabled devices, please verify the Bluetooth capability before attempting to connect to the keyboard.
2. After pairing for the first time, your device will automatically connect to the keyboard automatically when powering on or waking up the keyboard. Unless the keyboard has been paired with something else.
3. In case of connection failure, Delete the pairing record from your device and try the above procedures again.

Changing keyboard layout (chosen in the operating system)

Samsung Android: Skift + Space
Google Android: Ctrl + Space
Windows: Alt + skift
iOS 8:  +Space
iOS 9: Ctrl + Space

Power saving mode (bluetooth mode)

The Keyboard will enter sleep mode after being idle for 30 minutes. To activate it, press any key and wait for 3 seconds to reconnect.

How to charge


1. Use the included Micro-USB cable for charging. Connect one end to a USB charger or port, and the other to the keyboard. The keyboard can be used while charging.
2. Whilst charging, the power indicator will turn red. Approximately 2 hours until fully charged. (USB charger is not included, but cable to USB port works)

Battery life tip


When not in use for a prolonged period of time, it is recommended that the keyboard is turned off to lengthen the battery life.

Troubleshooting for wireless mode

If you are unable to connect the keyboard, please try the following:

1. Make sure the keyboard is in Bluetooth mode. State indicator light is blue when keyboard is powered on. Press "FN+  " switch to wireless connection.
2. Starting with a full charge on both devices ensures that process won't be interrupted by low battery.
3. Make sure your devices Bluetooth is on.
4. Make sure that the keyboard is within the effective operation distance of 10 meters. (line of sight, walls etc. will reduce operational range)

Troubleshooting for wired mode

Make sure that the keyboard is in wired mode. Press "FN+  " switch to wired connection, State indicator light should be green.

Safety instructions

1. Keep the keyboard away from sharp objects that could damage it.
2. Do not put heavy objects on the keyboard.
3. Do not stretch, twist or apply force to the keyboard.
4. To clean the keyboard, gently wipe it by using a moist cotton cloth.
5. Make sure the keyboard is turned off before cleaning. Do not use liquid cleanser.
6. Please do not spill liquids on the keyboard.
7. Avoid extreme hot and cold temperatures.

Technical specifications

Supported platforms of Penclit Mini Keyboard KB3.

- Windows XP and newer.
- Android
- iOS
- OSX

No driver needed.

Bluetooth version 3.0

USB HID 1.1 compatible.

Battery capacity: 250mAh

Battery type: Lithium-polymer battery

Battery voltage: 3.1V~4.2V

Sleep energy saving mode activates after 30 minutes, press any button to reconnect.

Wireless reach: up to 10 meters



Measurements:

Height: 10.25 mm
Surface: 280 x 115.5 mm
Weight: 284 grams
Cable length: 150 cm

Contact

+46 705 802 140
contact@penclit.se